

DOOR HOLDING MAGNET GT63R062

Product Datasheet

Features

- Intended for on-wall mounting
- Integrated manual release button
- Marine certified DNV GL (Certificate number TAE00002JD)
- High stability with the use of the plastic PA6 incl. a portion of 30% fibre glass
- Two cable connections PG11
- VdS quality tested according to EN1155/EN14637



Description

The door Hold open device for fire protection exclusions (fire protection swing doors, rolling gates, fire shutters with self-locking devices).

The fire door is normally held in the open state to allow easy passage and access through busy corridors. Controlled by a fire detection system, the door holding magnet releases the door when the power is cut and the over-door closer quickly closes the fire door automatically to prevent the spread of fire and smoke throughout the premises.


The door holding magnet GT63R062 is to be used together with the keeper plate GT63R006.



| Part number | Description |
|-------------------|---|
| 116-6731-017.0009 | Door Holding Magnet GT63R062 |
| 116-6731-016.0011 | Keeper Plate with angle adjustment GT63R006 |

| Technical specifications | |
|-----------------------------|-----------------|
| Dimensions (H x W x D) (mm) | 105 x 85 x 37,5 |
| Mounting | On wall |
| Voltage (V) | 24 |
| Holding force (N) | 700 |
| Rated power (W) | 1,5 |
| Duty cycle (%) | 100 |
| Cable connections | Two PG11 |
| VDS number | 23049 |
| Magnet diameter (mm) | 63 |
| Protection grade | IP65 |

Dimensions

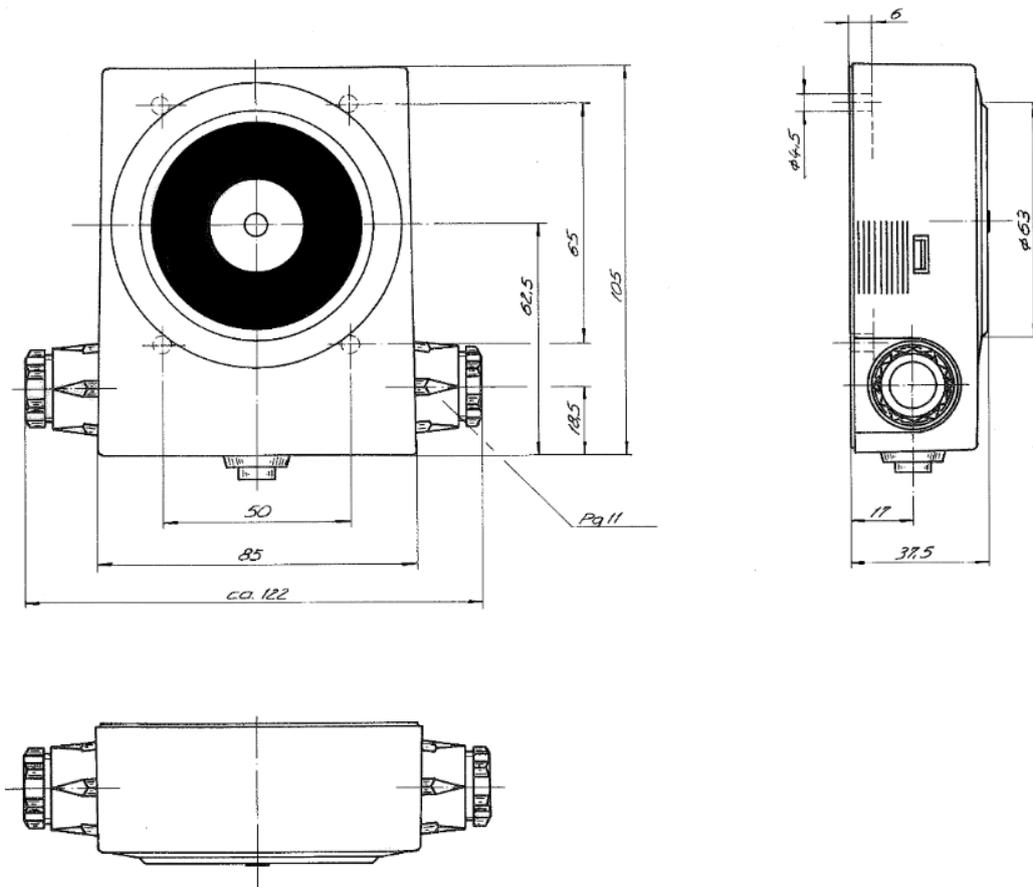

Connections

